


Lâwe kanaa masaraka neneg “Keyman” kûmbuyutur mo


1: Lâwe gu kûmbuyutur nam njârto ninnde-ken, kûmbuyutur nam Internet ta gani ilu lûtturaña kanaa wî nduñ: https://keyman.com/keyboards/sil_tchad

Kanaa wî nduñ-gim sura gi tarti:

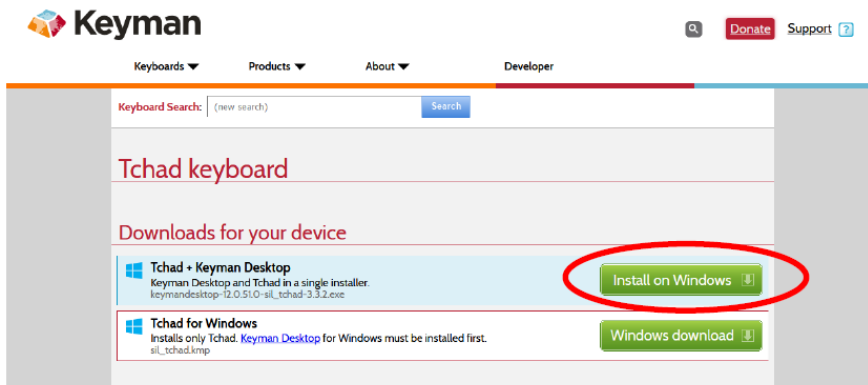


Sura gi tara-gim gani ûnjuci gûrko ucuña-gim tom genin tûsurti.

2: Tûsura-gim sura gu:

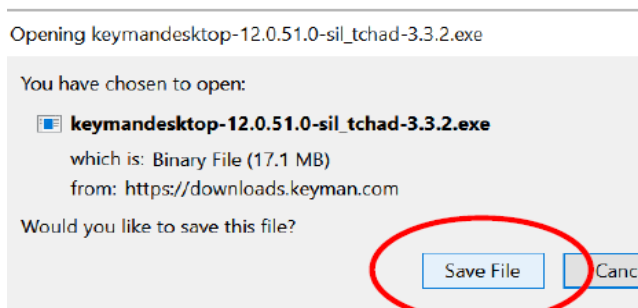

tanarin, gani unucice gûrko ucuña-gim tom genin tusulteye.

3: Hâgudu gani njâr nusula-gim laya “keymandesktop” ru ena ilim:

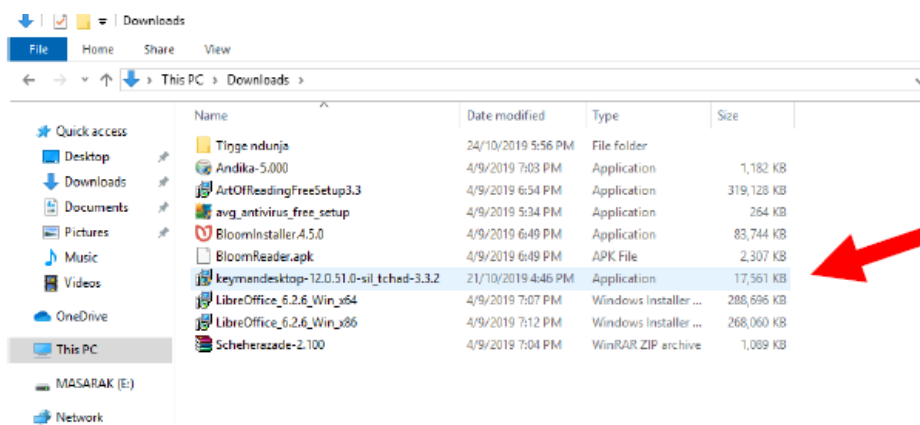

mbîri tom genin, haywa (yes) tîrnañin, gani haywa ilim tom genteye.

4: Hâgudu haywa (yes) gim tom genan, sura igu tanarteye:



Tanara ilim gani nenjera nima diñ tena-gim tom gena rûse de sura igu tanarin:




gani nenjera nima diñ tena-gim tom genin, keyman kûmbuyutur mo dâsir gim




tûsurteye.

5: Tûsura-gim ti tindam tom genin sura gu:



tanarin, gani nenjera nima ndiñ tena-gim tom genin sura gu tanarteye:

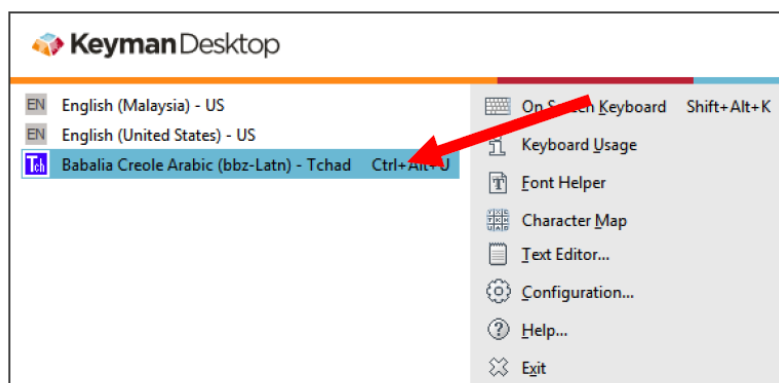


6: Sura ilu tanara-gim gani nenjera nima diŋ tena-gim tom genin kûmbuyutur taŋa disir gani kanaa orgoloŋe gim:



torgoloŋiŋin gani katab gete-gim lân masaraka mbo katab geteye.


Katab geya

1: Gani katab gete gu lûtturaŋ, hâgudu kûmbuyutur taŋ dîsir mo gani kanaa orgoloŋe gim lay:

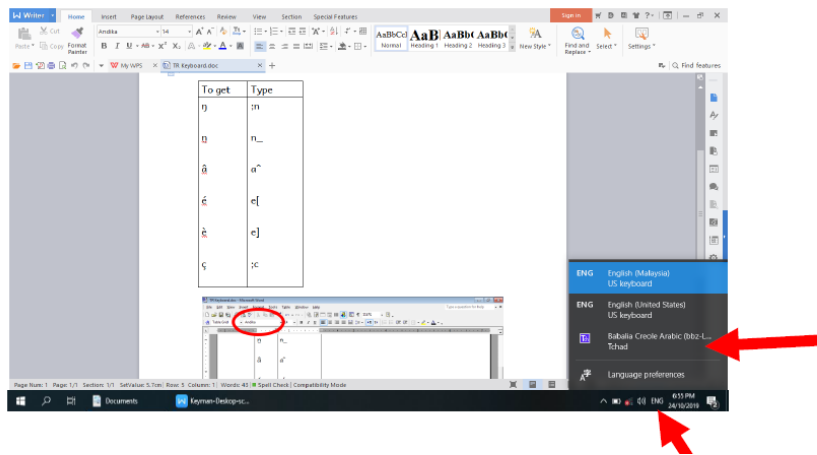

Kanaa Tchad taŋa nima diŋ tena gim tom genin torgoloŋiŋi.

2: Hâgudu galam ko ndeleŋtiyan, gani galamko endere nima diŋ tena gim lay

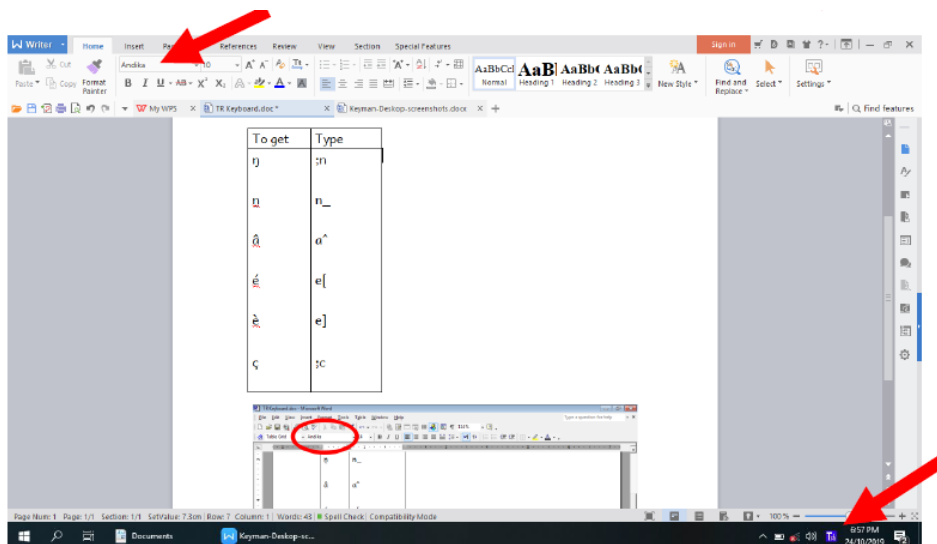

tom genin galamta tanarin, “Andika” yoŋ “Charis SIL literacy” yoŋ tu ndeleŋti.

Ŋgo ken tîŋge (ŋ - ŋ̄ - â) nduŋti?

1: ŋ wo nduŋtiyan ; + n = ŋ

2: ŋ̄ wo nduŋtiyan n + shift + _- = ŋ̄

3: â wo nduŋtiyan a + shift + ô = â